
SONOROU'S ACCESSORIES


SUREFIX MOUNT SYSTEM

SONOROUS PROVIDES AUDIO&VIDEO RELATED PRODUCTS WITH FOCUS ON QUALITY, FUNCTIONALITY AND AESTHETICS. FOUNDED IN 2004, A SOLID POSITION AND REPUTATION WORLDWIDE HAS BEEN BUILT UP OVER THE YEARS. NOW REPRESENTED WORLDWIDE IN MORE THAN 50 COUNTRIES VIA STRONG PARTNERSHIPS WITH A GLOBAL NETWORK OF DISTRIBUTORS.

OUR PRODUCTS ARE ENGINEERED TO MEET THE DEMANDING NEEDS OF TODAY'S ELECTRONICS AND REPRESENT AN ATTENTIVE MONITORING OF MARKET TRENDS AND CHANGES. CONTINUOUS RESEARCH INTO MATERIALS AND FINISHES HAS BEEN DISTINGUISHING CHARACTERISTICS OF SONOROUS.

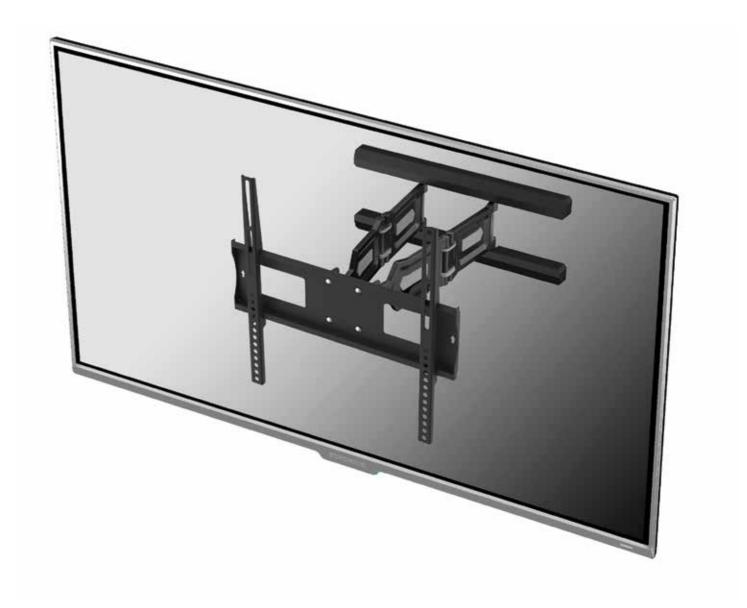


FIXED

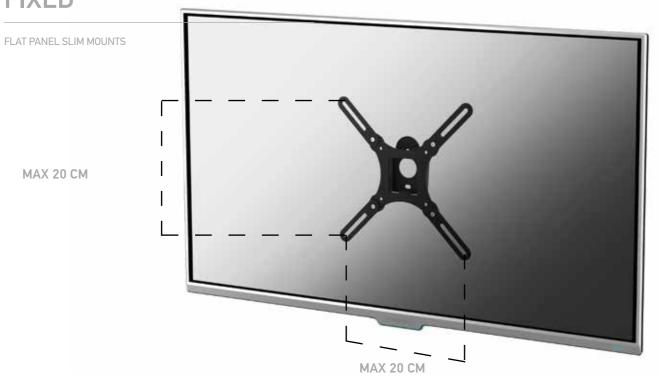

SUREFIX 211


SCREEN SIZE: 22"/37" MAX. LOAD: 25 KG

DISTANCE TO WALL: 18 MM

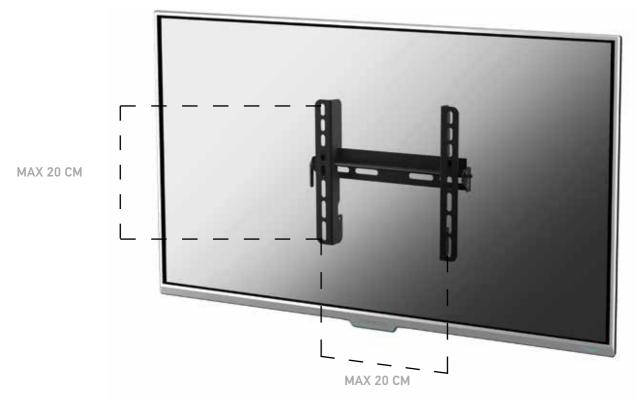

SUREFIX 132


SCREEN SIZE: 22"/42" MAX. LOAD: 40 KG DISTANCE TO WALL: 29 MM

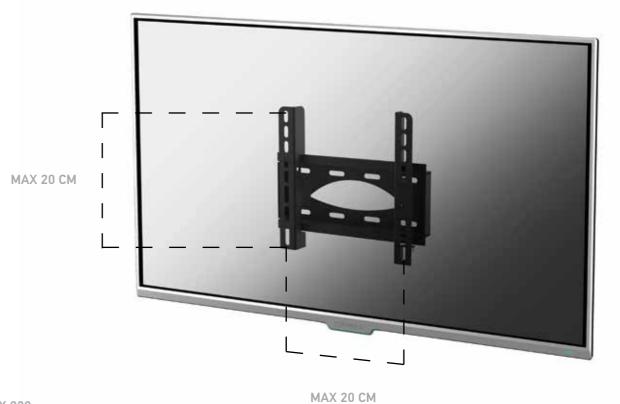

SUREFIX 220

SCREEN SIZE: 22"/42" MAX. LOAD: 40 KG

DISTANCE TO WALL: 36 MM

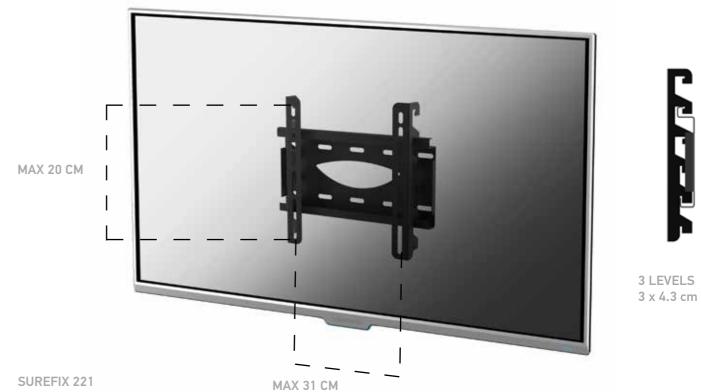


SCREEN SIZE: 22"/42"

MAX. LOAD: 30 KG

DISTANCE TO WALL: 39 MM

ADJUSTABLE POSITION

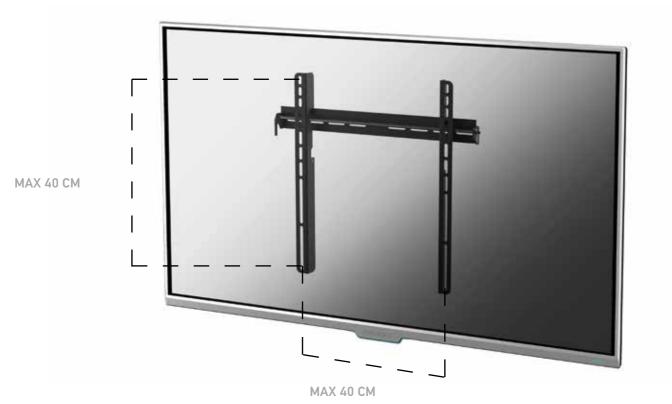


SUREFIX 142

SCREEN SIZE: 26"/55"

MAX. LOAD: 50 KG

DISTANCE TO WALL: 29 MM

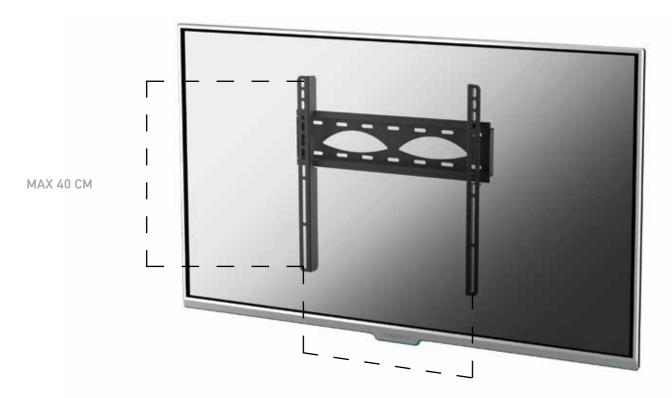



SUREFIX 230

SCREEN SIZE: 32"/55"

MAX. LOAD: 50 KG

DISTANCE TO WALL: 36 MM

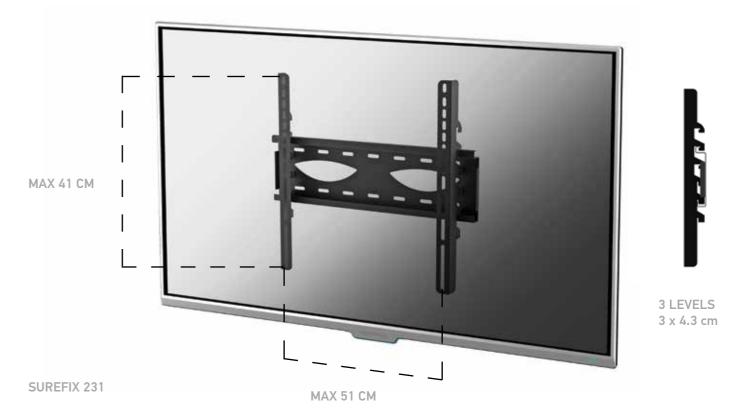

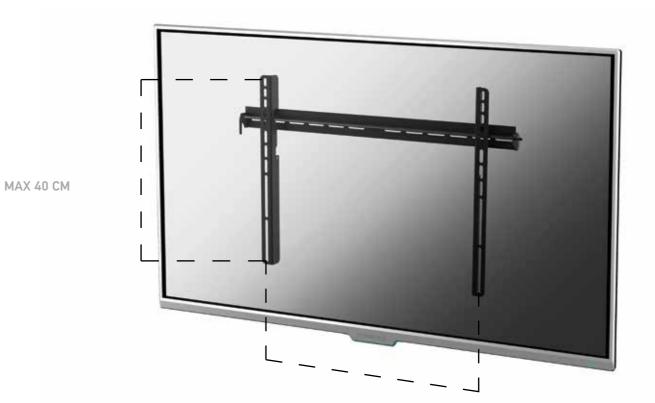

SUREFIX 152

SCREEN SIZE: 32"/55" MAX. LOAD: 40 KG

DISTANCE TO WALL: 53 MM

ADJUSTABLE POSITION

SCREEN SIZE: 40"/60"

MAX. LOAD: 70 KG

DISTANCE TO WALL: 29 MM

MAX 40 CM

MAX 60 CM



SCREEN SIZE: 32"/60"

MAX. LOAD: 60 KG

DISTANCE TO WALL: 36 MM


UNIVERSAL

LIFETIME WARRANTY

ALL HARDWARE INCLUDED all profe

VESA 200x200 100x400, 600x400

WATHRATT | INCLUDED | TALETHOTT | 400X400, OC

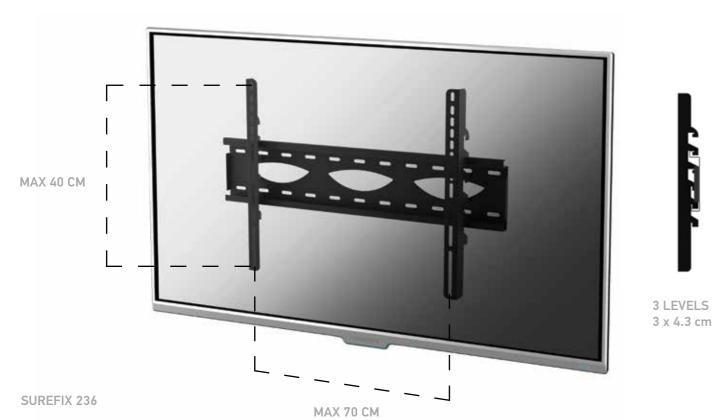

SCREEN SIZE: 32"/65"

MAX. LOAD: 50 KG

DISTANCE TO WALL: 53 MM

ADJUSTABLE POSITION


UNIVERSAL

LIFETIME WARRANT

ALL HARDW

ALL HARDWARE INCLUDED

E VESA 200x200

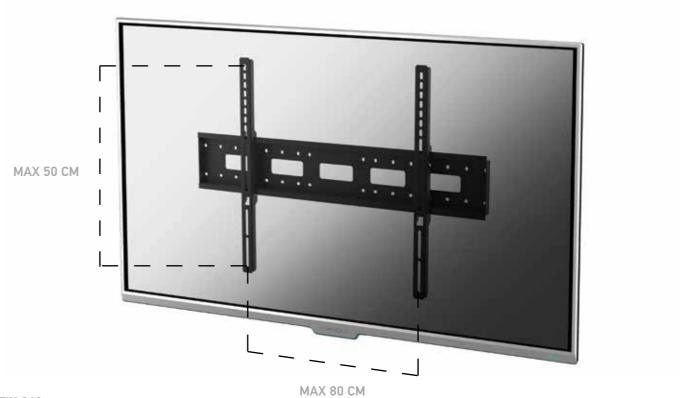

SUREFIX 240

SCREEN SIZE: 40"/82"

MAX. LOAD: 80 KG

DISTANCE TO WALL: 36 MM


UNIVERSAL

LIFETIME ALL WARRANTY IN

WARE FALL

VESA 40 ROFF 600x400,

SA IS A REGISTERED TRADE MARK OF VIDEO ELECTRONICS STANDARDS ASSOCITATION

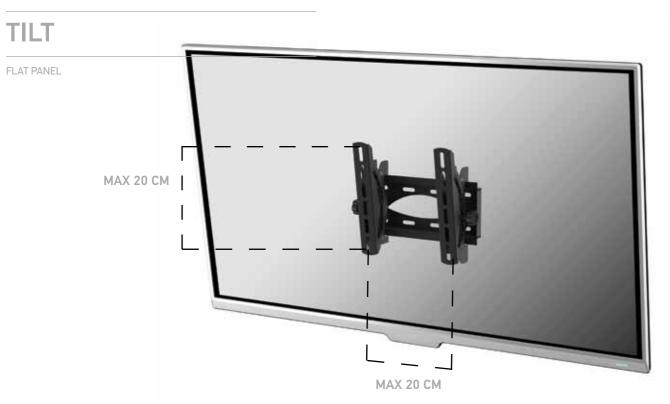

SUREFIX 320


SCREEN SIZE: 22"/42"

MAX. LOAD: 30 KG

DISTANCE TO WALL: 69 MM

TILT: ±10°



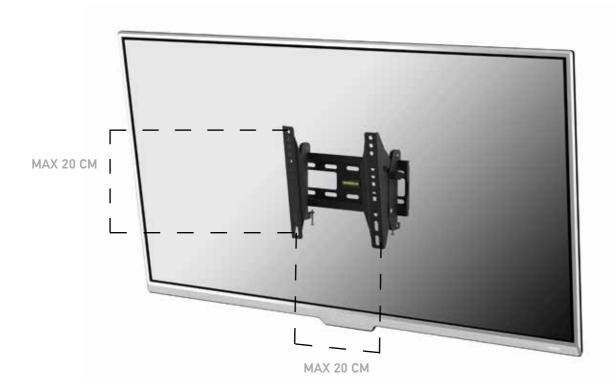


SUREFIX 322

SCREEN SIZE: 22"/42"

MAX. LOAD: 30 KG

DISTANCE TO WALL: 69 MM

TILT: ±10°

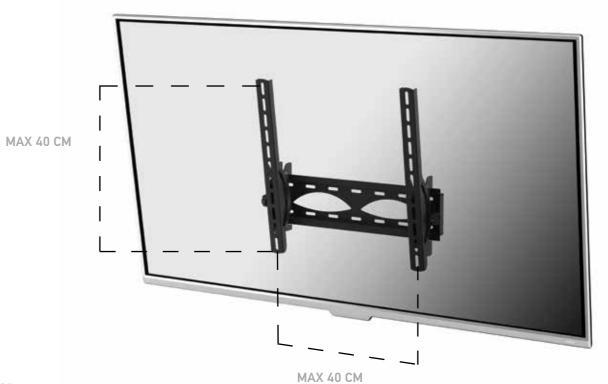


SUREFIX 330

SCREEN SIZE: 26"/55"

MAX. LOAD: 40 KG

DISTANCE TO WALL: 69 MM

TILT: ±10°

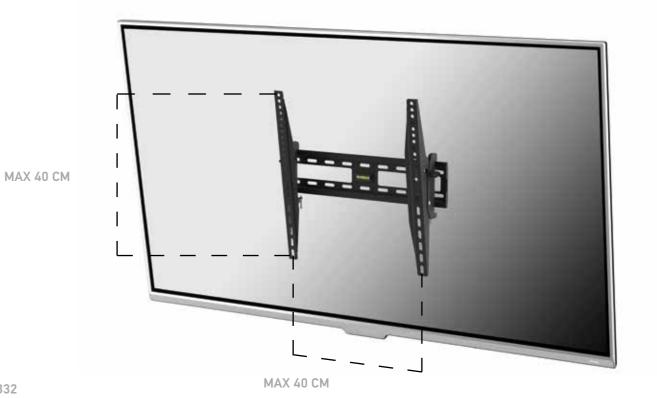


SUREFIX 332

SCREEN SIZE: 55"

MAX. LOAD: 40 KG

DISTANCE TO WALL: 69 MM

TILT: +10°/-15°

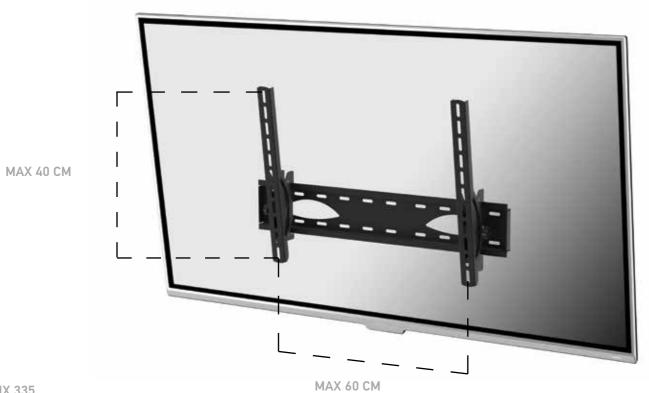


SUREFIX 335

SCREEN SIZE: 40"/60"

MAX. LOAD: 50 KG

DISTANCE TO WALL: 69 MM

TILT: ±10°

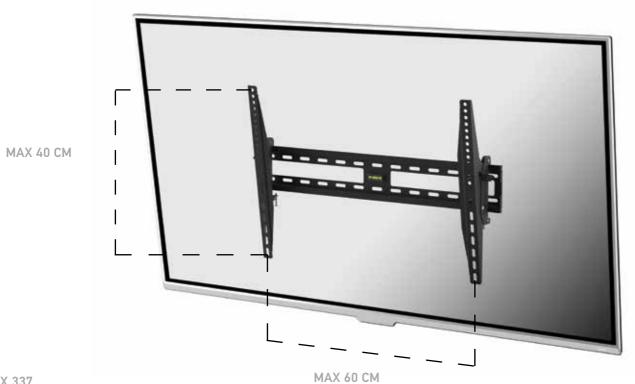

12

SUREFIX 337

SCREEN SIZE: 40"/60"

MAX. LOAD: 50 KG

DISTANCE TO WALL: 69 MM

TILT: +10°/-15°

UIFETIME ALL HARDWARE FALL PROFF 400x400, 600x400

---MAX 50 CM MAX 80 CM

13

SUREFIX 340

SCREEN SIZE: 40"/65"

MAX. LOAD: 70 KG

DISTANCE TO WALL: 72 MM

TILT: ±10°

SLIM

FLAT PANEL SUPER SLIM MOUNTS



SUREFIX 410

SCREEN SIZE: 26"/50"

MAX. LOAD: 50 KG

DISTANCE TO WALL: 14 MM

UIFETIME ALL HARDWARE FALL PROFF VESA 200x∞ 100x∞ 400x∞ 100x∞ 400x∞ 400



14

SUREFIX 420

SCREEN SIZE: 23"/50"

MAX. LOAD: 30 KG

DISTANCE TO WALL: 13 MM




LIFETIME WARRANTY



VESA 200x20

A REGISTERED TRADE MARK OF VIDEO ELECTRONICS STANDARDS ASSOCITAT

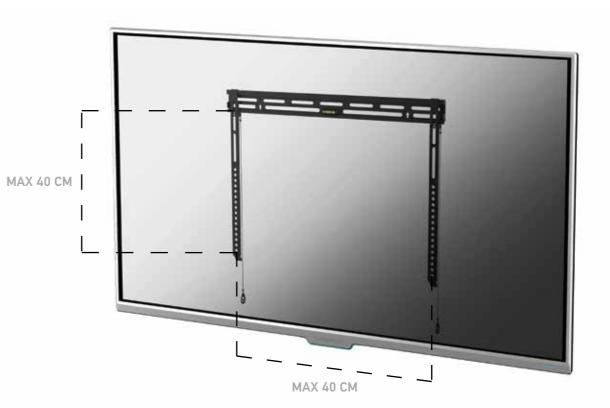

15

SUREFIX 421

SCREEN SIZE: 32"/60"

MAX. LOAD: 40 KG

DISTANCE TO WALL: 13 MM


UNIVERSAL

LIFETIME AL

ALL HARDWARE

VESA 200x2 400x400, 600

VESA IS A REGISTERED TRADE MARK OF VIDEO ELECTRONICS STANDARDS ASSOCITATION

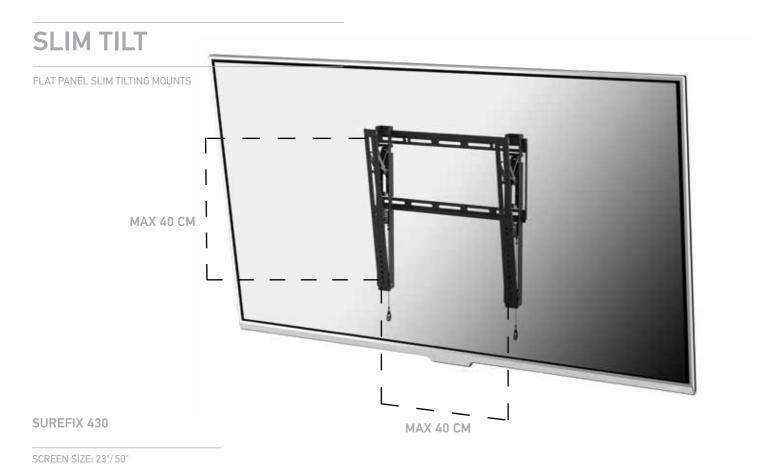

MAX. LOAD: 30 KG

SCREEN SIZE: 32"/60"


DISTANCE TO WALL: 25 MM


MAX. LOAD: 40 KG


TILT: -10°


TILT: -10°

DISTANCE TO WALL: 25 MM

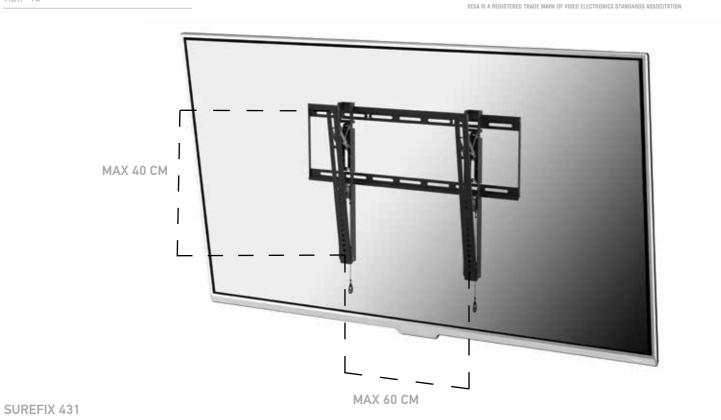

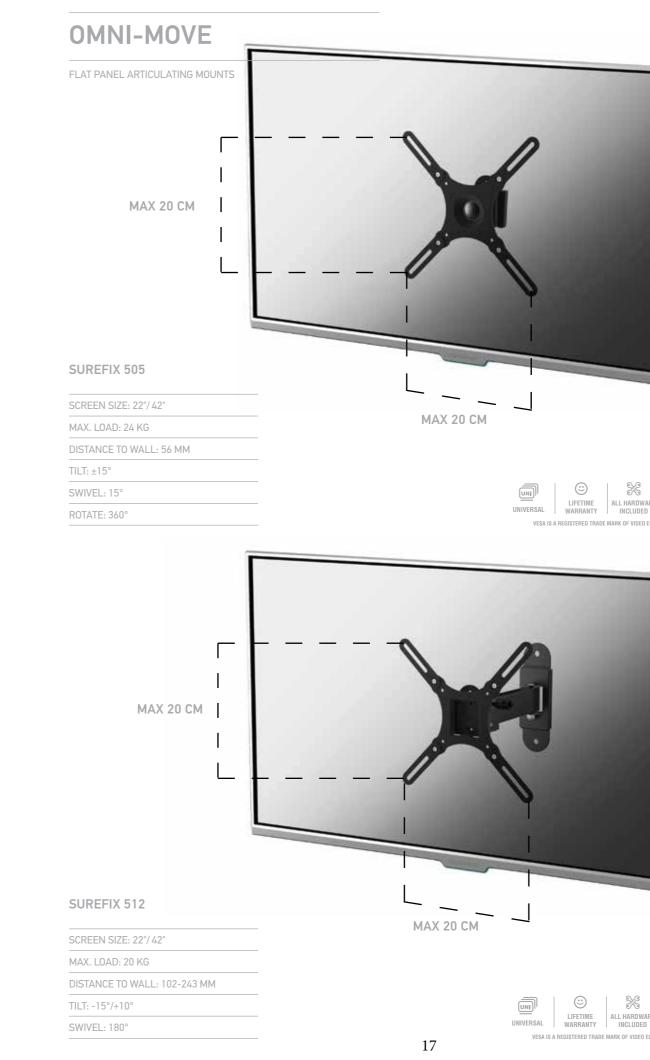


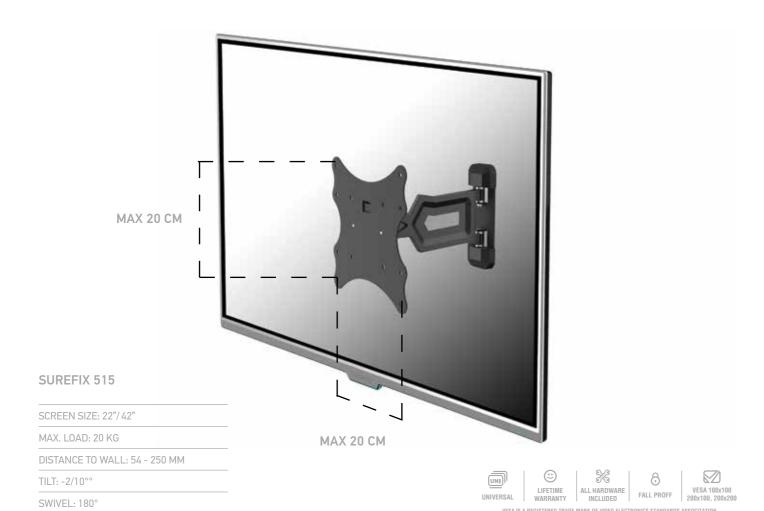


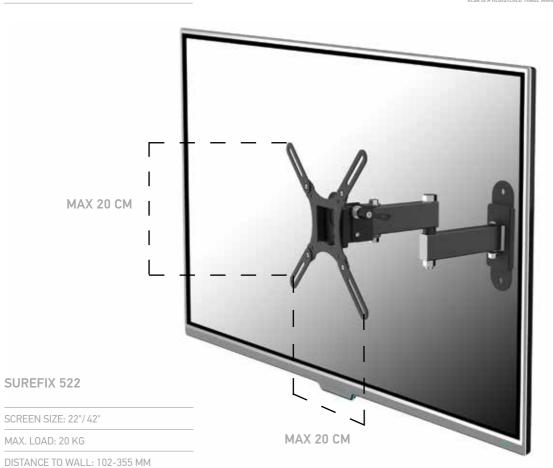

TILT: -15°/+10°

SWIVEL: 180°

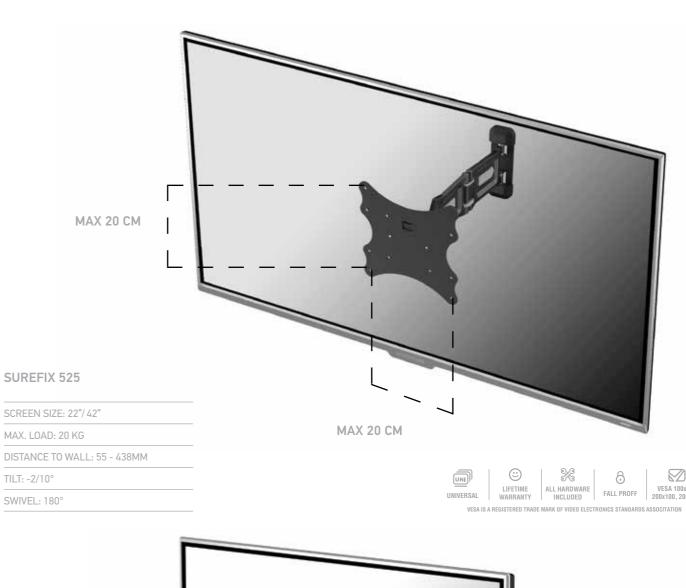

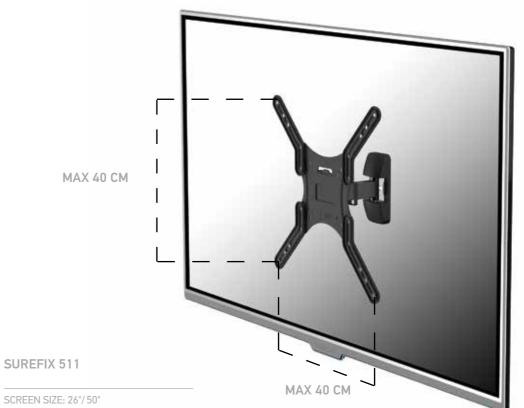

MAX. LOAD: 36 KG

TILT: -2°/+10°

SWIVEL: 180°

DISTANCE TO WALL: 54.5-211 MM

UNIVERSAL

LIFETIME

IE ALL HARDW


8


VESA IS A REGISTERED TRADE MARK OF VIDEO ELECTRONICS STANDARDS ASSOCITATION

18

19

)

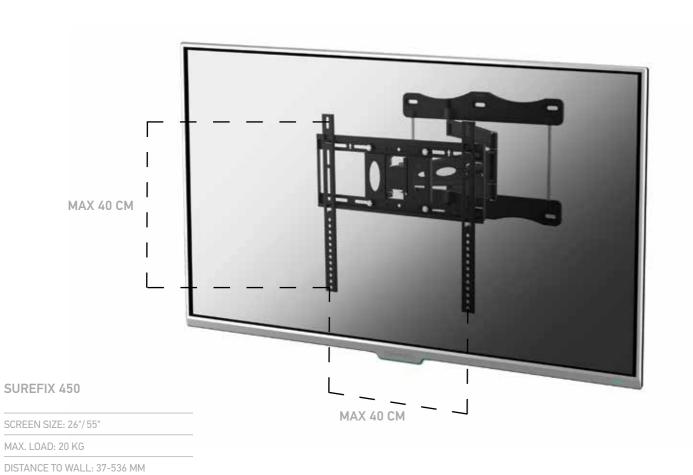

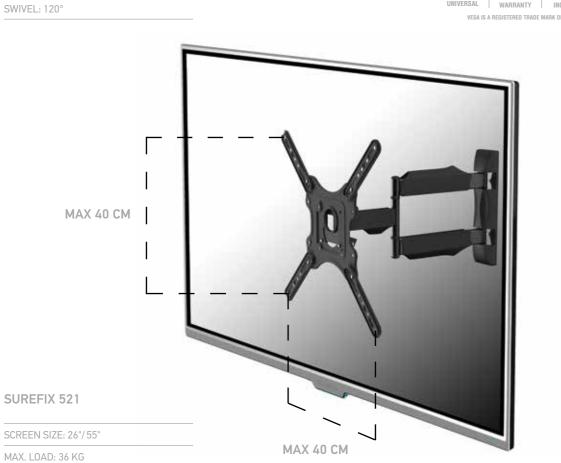



TILT: ±10°

DISTANCE TO WALL: 46.5-501 MM

TILT: -2°/+10°

SWIVEL: 180°

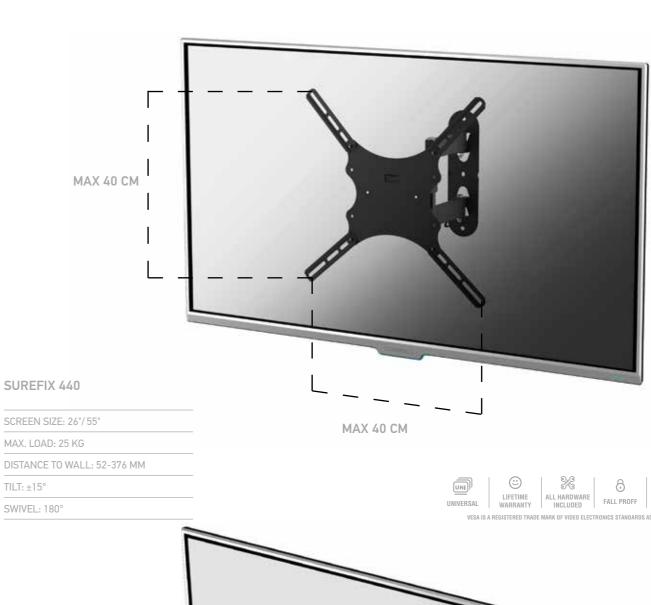

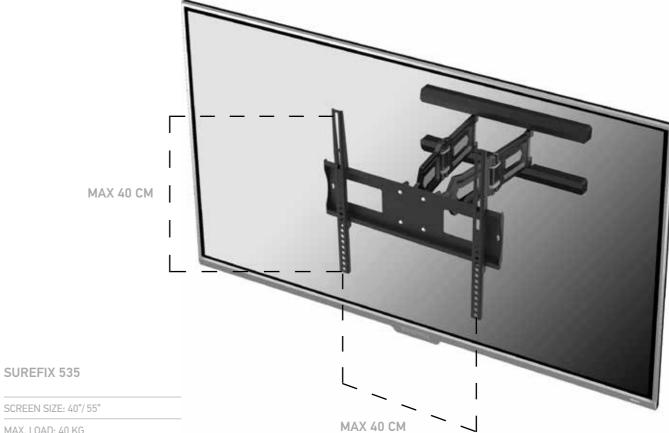

SCREEN SIZE: 40"/55"

MAX. LOAD: 40 KG


TILT: ±15°


DISTANCE TO WALL: 80-465 MM


TILT: +5/-15°

SWIVEL: 180°

20

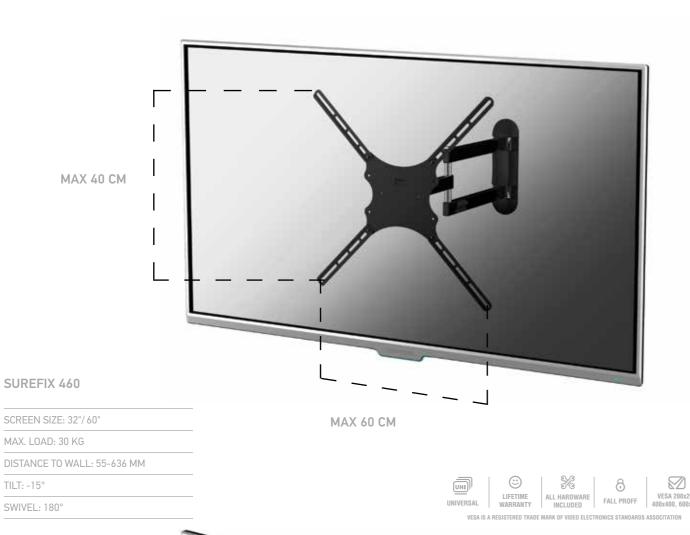

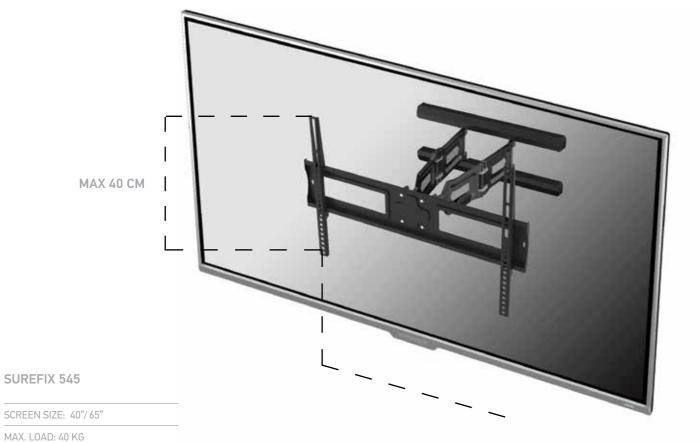

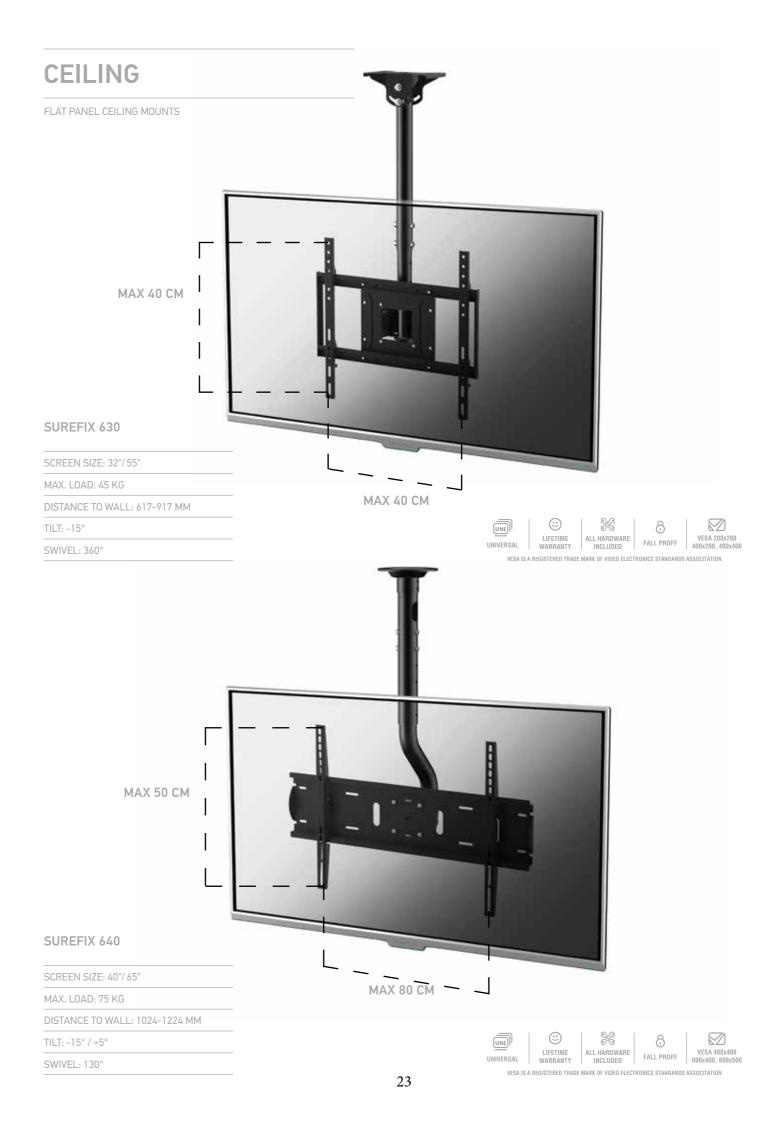

DISTANCE TO WALL: 80 - 465 MM

TILT: +5/-15°

SWIVEL:180°

PROJECTOR PROJECTOR CEILING MOUNTS FIXED 22.6 CM SUREFIX 910


UNIVERSAL LIFETIME ALL HARDWARE INCLUDED FALL PROFF

FIXED 20 CM







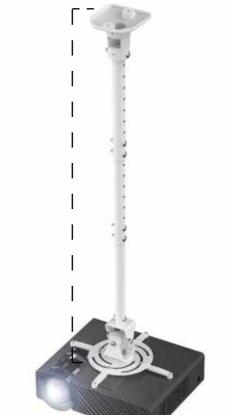

SUREFIX 920

MAX. LOAD: 14 KG

TILT: ±50°

SWIVEL: 360°

DISTANCE TO CEILING: 226 MM

MAX. LOAD: 14 KG

DISTANCE TO CEILING: 226-1137 MM

MIN 22.6 CM MAX 113.2 CM

TILT: ±50°

SWIVEL: 360°





SOUNDBAR



SUREFIX SOUNDBAR


MAX. LOAD: 30 KG

MAX. LOAD: 6,5 KG

TILT: +15°/-60°

SWIVEL: 360°

DESK

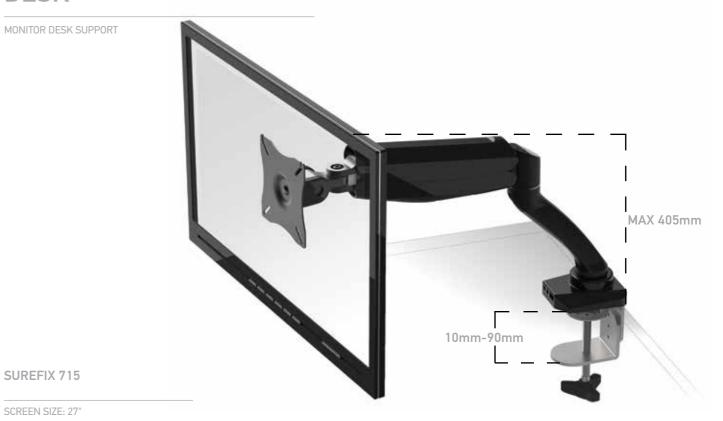









AUDIO & VIDEO WALL SUPPORT




AUDIO & VIDEO WALL SUPPORT

PL 2620 AUDIO & VIDEO WALL SUPPORT

MAX. LOAD (EACH SHELF): 5 KG
SHELF SIZE: 330x450 MM


GLASS COLOR OPTIONS: CLEAR, BLACK
ALUMINIUM COLOR OPTIONS: SILVER, BLACK



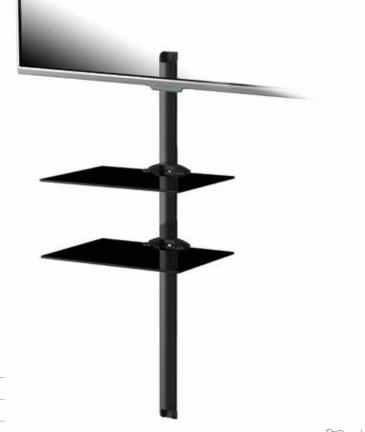

CABLE

SAFETY

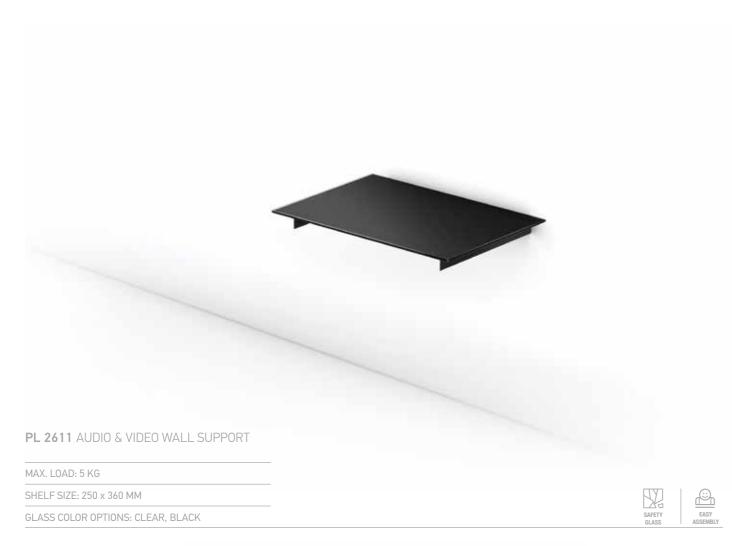




CC 50 CM / CC 100 CM AUDIO & VIDEO WALL SUPPORT

HEIGHT: 50 CM / 100 CM

ALUMINIUM COLOR OPTIONS: SILVER, BLACK





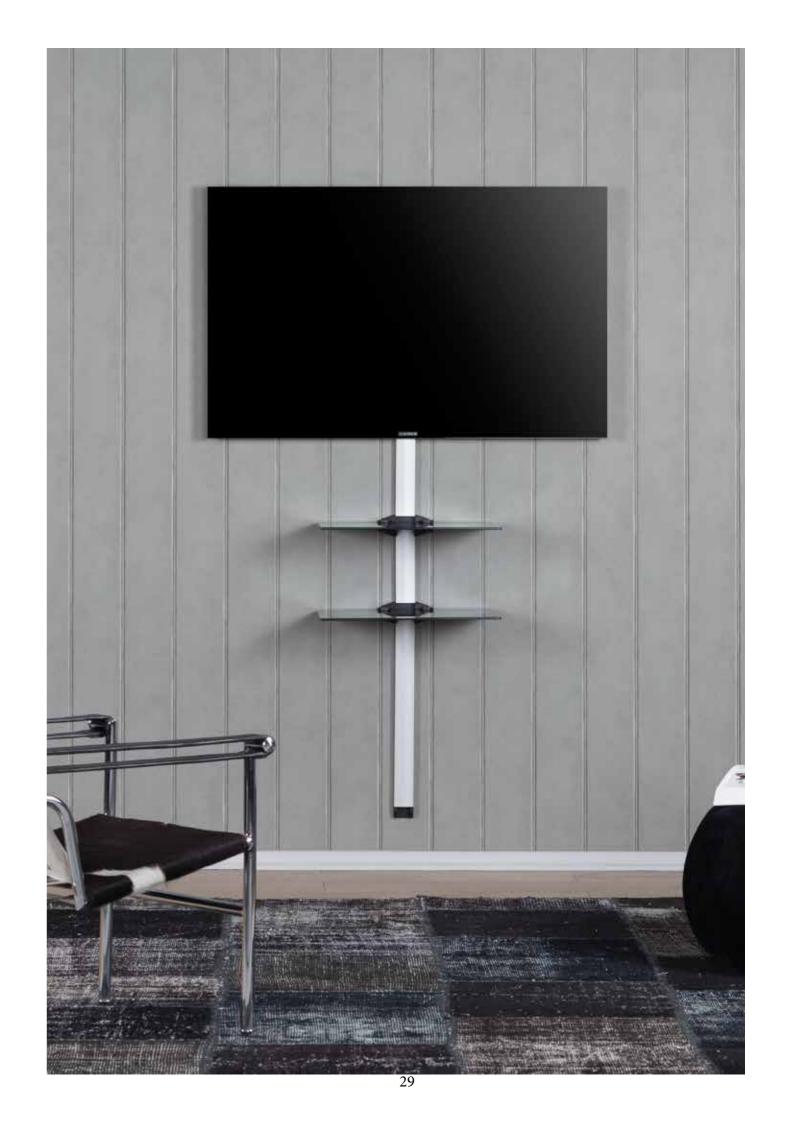

SONOROUS ESSENTIALS

SONOROUS ESSENTIALS ARE DESIGNED AND MANUFACTURED TO SUPPORT ALL DEMANDS OF NEWEST TECHNOLOGY. HIGHEST STANDARDS AND UNIVERSAL SPECIFICATIONS ARE CONSIDERED IN EVERY DETAIL, MAKING LIFE EASIER AND MORE CONVENIENT.



HDMI FLEX



HDMI 19 PIN-M TO HDMI 19 PIN-M

HDMI v1.4 COMPLIANT, SUPPORTS 1080P

100% TRIPLE SHIELD

24 K GOLD PLATED CONNECTORS

OXYGEN FREE COPPER CONDUCTORS

180° FLEXIBILITY

PLASTIC SHELL

1.5 M & 2 M LENGTH















HDMI PRO



HDMI 19 PIN-M TO HDMI 19 PIN-M

HDMI v1.4 COMPLIANT, SUPPORTS 1080P

100% TRIPLE SHIELD

24 K GOLD PLATED CONNECTORS

OXYGEN FREE COPPER CONDUCTORS

PLASTIC SHELL

5 M, 10 M, 15 M, 20 M LENGTH







HDMI® HIGH SPEED
with ETHERNET







HDMI BLACK



HDMI 19 PIN-M TO HDMI 19 PIN-M

HDMI v1.4 COMPLIANT, SUPPORTS 1080P

100% TRIPLE SHIELD

BLACK COLOR NYLON JACKET

24 K GOLD PLATED CONNECTORS

OXYGEN FREE COPPER CONDUCTORS

HIGH GLOSS METALLIC SHELL

1.5 M & 2 M & 3 M LENGTH















HDMI SILVER



HDMI NEO



HDMI 19 PIN-M TO HDMI 19 PIN-M HDMI v1.4 COMPLIANT, SUPPORTS 1080P 100% TRIPLE SHIELD BLACK COLOR NYLON JACKET 24 K GOLD PLATED CONNECTORS OXYGEN FREE COPPER CONDUCTORS PLASTIC SHELL 1.5 M LENGTH



HDMI ULTRA HD



HDMI 19 PIN-M TO HDMI 19 PIN-M

HDMI v1.4 COMPLIANT, SUPPORTS 1080P - 2160P

100% TRIPLE SHIELD

BLACK COLOR NYLON JACKET

24 K GOLD PLATED CONNECTORS

OXYGEN FREE COPPER CONDUCTORS

PLASTIC SHELL

1.5 M, 2 M & 3 M XLENGTH

















HDMI®

HIGH SPEED with ETHERNET

HDMI®

HIGH SPEED with ETHERNET





HDMI SLIM-Black/White

HDMI 19 PIN-M TO HDMI 19 PIN-M

HDMI v1.4 COMPLIANT, SUPPORTS 1080P

100% TRIPLE SHIELD

WHITE & BLACK COLOR CABLE

24 K GOLD PLATED CONNECTORS

OXYGEN FREE COPPER CONDUCTORS

SHORT PLASTIC SHELL

1.5 M & 3 M LENGTH



HDMI MINI



HDMI 19 PIN-M TO HDMI 19 PIN-M

HDMI v1.4 COMPLIANT, SUPPORTS 1080P

100% TRIPLE SHIELD

OXYGEN FREE COPPER CONDUCTORS

PLASTIC SHELL

1,5 M LENGTH





HDMI EVO



HDMI 19 PIN-M TO HDMI 19 PIN-M

100% TRIPLE SHIELD

24 K GOLD PLATED CONNECTORS

OXYGEN FREE COPPER CONDUCTORS

HDMI v1.4 COMPLIANT, SUPPORTS 1080P

PLASTIC SHELL

1.5 M & 3 M LENGTH









H⊒MI°

HDMI MICRO



HDMI 19 PIN-M TO HDMI 19 PIN-M HDMI v1.4 COMPLIANT, SUPPORTS 1080P 100% TRIPLE SHIELD OXYGEN FREE COPPER CONDUCTORS PLASTIC SHELL 1,5 M LENGTH











HIGH SPEED with ETHERNET



AUX CABLE (90)



AUX CABLE (M-F)

Headphones or Auxiliary Audio input

1.5 M LENGTH





3.5mm Stero-mini Port extension for

Headphones or Auxiliary Audio input

1.5 M LENGTH









AUX CABLE AUDIO

3.5ST - 3.5 ST





3.5mm Stero-mini Port for

Headphones or Auxiliary Audio input

1.5 M LENGTH

OPTIC

FIBER OPTIC / TOSLINK AUDIO CONNECTION





For transmitting the optical digital audio signal, e.g. CD player to amplifie

1.5 M, 3 M LENGTH











MINI USB





USB CHARGING & DATA CABLE

USB 2.0 COMPATIBLE

1.5 M LENGTH







MICRO USB





USB CHARGING & DATA CABLE
USB 2.0 COMPATIBLE
1.5 M LENGTH





2 M LENGTH

HDMI SWITCH



HDMI V1.4A COMPLIANT HDCP 1.2 COMPLIANT

FULL HD 1080P, 3D SUPPORT

COMPACT SIZE, SMART AND FAST SWITCHING

HIGH QUALITY FINISHING

WITH 0.9M HDMI CABLE















IR REPEATER



40

IR REPEATER

Full Control for Home Theater Components Located Behind Cabinet Doors

HIDDEN IR REPEATER BOX

3 OUTPUT EMITTERS (1M) CORD

3 OUTPUT EMITTERS (2M) CORD

IR RECEIVER WITH 1M CORD AND 4-PIN DIN CONNECTOR

PLUG-IN POWER SUPPLY













HDMI ADAPTER
















PARK & CHARGE

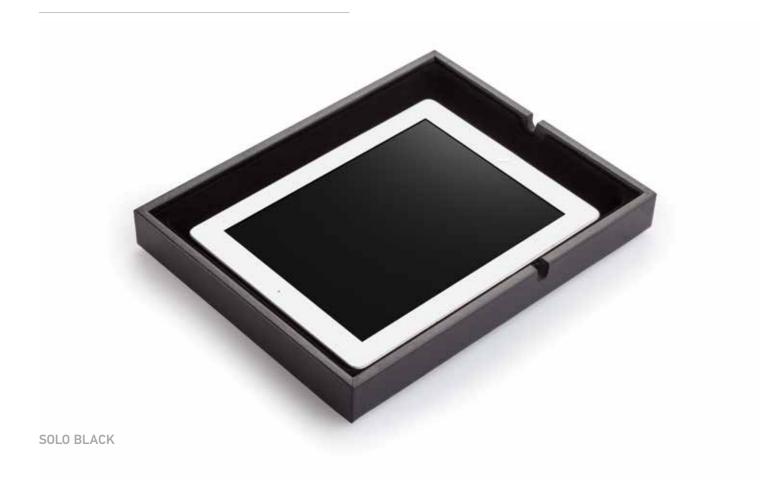







MULTI BLACK



MONITOR STAND



MONITOR STAND

MAX. LOAD: 10 KG

SAFETY



LCD & PLASMA TV SCREEN SOLUTION

Sonorous Screen Saver reduces the static electricity and provides UV protection. It can even be applied on warm screens and works on all CRT, TFT, LCD screens and furniture.



SCREEN SAVER

SIZE:150 ML











SURGE PROTECTOR

SURGE PROTECTOR SP-01

SURGE PROTECTOR IS AN APPLIANCE DESIGNED TO PROTECT ELECTRICAL DEVICES FROM VOLTAGE SPIKES INCLUDING THOSE CAUSED BY LIGHTENING. A SURGE PROTECTOR ATTEMPTS TO LIMIT THE VOLTAGE SUPPLIED TO AN ELECTRIC DEVICE BY EITHER BLOCKING OR BY SHORTING TO GROUND ANY UNWANTED VOLTAGES ABOVE A SAFE THRESHOLD.

POWER: 230V - 16A MAX - 3680W MAX PROTECTION: OVERLOAD (16A, 250V AC) SOCKETS: SCHUKO x 1 USB PORTS: 2(5V DC, 2, 1A MAX.) JOULES: 570








SURGE PROTECTOR IS AN APPLIANCE DESIGNED TO PROTECT ELECTRICAL DEVICES FROM VOLTAGE SPIKES INCLUDING THOSE CAUSED BY LIGHTENING. A SURGE PROTECTOR ATTEMPTS TO LIMIT THE VOLTAGE SUPPLIED TO AN ELECTRIC DEVICE BY EITHER BLOCKING OR BY SHORTING TO GROUND ANY UNWANTED VOLTAGES ABOVE A SAFE THRESHOLD.

POWER: 230V - 16A MAX - 3680W MAX PROTECTION: OVERLOAD (16A, 250V AC) SOCKETS: SCHUKO x CABLE LENGTH: 1.5 M JOULES: 1400

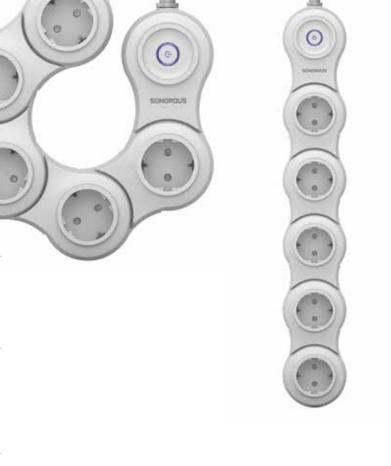

SONOBOUS 00

SURGE PROTECTOR SP-04-FLEX

SURGE PROTECTOR IS AN APPLIANCE DESIGNED TO PROTECT ELECTRICAL DEVICES FROM VOLTAGE SPIKES INCLUDING THOSE CAUSED BY LIGHTENING. A SURGE PROTECTOR ATTEMPTS TO LIMIT THE VOLTAGE SUPPLIED TO AN ELECTRIC DEVICE BY EITHER BLOCKING OR BY SHORTING TO GROUND ANY UNWANTED VOLTAGES ABOVE A SAFE THRESHOLD.

POWER: 230V - 16A MAX - 3680W MAX PROTECTION: OVERLOAD (16A, 250V AC) SOCKETS: SCHUKO x 4 USB PORTS: 2(5V DC, 2, 1A MAX.) CABLE LENGTH: 1.5 M JOULES: 1400



SURGE PROTECTOR SP-05

SURGE PROTECTOR IS AN APPLIANCE DESIGNED TO PROTECT ELECTRICAL DEVICES FROM VOLTAGE SPIKES INCLUDING THOSE CAUSED BY LIGHTENING. A SURGE PROTECTOR ATTEMPTS TO LIMIT THE VOLTAGE SUPPLIED TO AN ELECTRIC DEVICE BY EITHER BLOCKING OR BY SHORTING TO GROUND ANY UNWANTED VOLTAGES ABOVE A SAFE THRESHOLD.

POWER: 250V - 16A MAX - 3680W MAX MAX SPIKE VOLTAGE: 6000V CLAMPING VOLTAGE: 775V FLOW BETWEEN POLES: 1050J 8 / 20 MS FLOW: 36000A RESPONSE TIME: 1NS EMI / RFI FILTER: 150KHZ - 100MHZ SOCKETS: SCHUKO X 5 JOULES: 750





SURGE PROTECTOR SP-08

SURGE PROTECTOR IS AN APPLIANCE DESIGNED TO PROTECT ELECTRICAL DEVICES FROM VOLTAGE SPIKES INCLUDING THOSE CAUSED BY LIGHTENING. A SURGE PROTECTOR ATTEMPTS TO LIMIT THE VOLTAGE SUPPLIED TO AN ELECTRIC DEVICE BY EITHER BLOCKING OR BY SHORTING TO GROUND ANY UNWANTED VOLTAGES ABOVE A SAFE THRESHOLD.

POWER: 250V - 16A MAX - 3680W MAX MAX SPIKE VOLTAGE: 6000V CLAMPING VOLTAGE: 775V FLOW BETWEEN POLES: 1050J 8 / 20 MS FLOW: 110000A RESPONSE TIME: 1NS EMI / RFI FILTER: 150KHZ - 100MHZ SOCKETS: SCHUKO X 8 USB CHARGE: 2100 MA JOULES: 1050

